

Logitank Combination LTKBL 60

A self bunded tank for the safe storage and handling of both diesel and AdBlue® or other DEF products from the one unit.
Ideal for refuelling commercial vehicles that use AdBlue® or DEF.



Features

- Greater than 110% bunding
- Bunded pump bay with lockable weatherproof doors
- Fill and dispense points in the main lockable pump bay
- Galvanised access ladder and platform
- Corner container lock castings for ease of transport
- Access manways
- Warranty – 5 years structural, 1 year on valves; conditions apply

Diesel tank standard with:


- Fluid level dipsticks for tank and interstitial space
- Vent pipes for diesel tank and interstitial space
- Suction foot valve, overfill protection and electronic overfill alarm

DEF tank standard with:

- Chemical resistant vented tank
- Insulated tank and dispensing line for temperature control
- Stainless steel pipework
- Fluid level dipsticks for tank and interstitial space

Tank Specifications

Description	
Safe Fill, litres	54,015 Diesel, 6,662 DEF
Length, mm	12,192
Width, mm	2,438
Height, mm	2,896
Tare Weight, kg	16,713
Vent Pipes	Standard
Fluid Level Dipsticks	Standard
Compliance	AS1940, AS1692, UL142, HSW (Haz.Sub.) Reg 2017

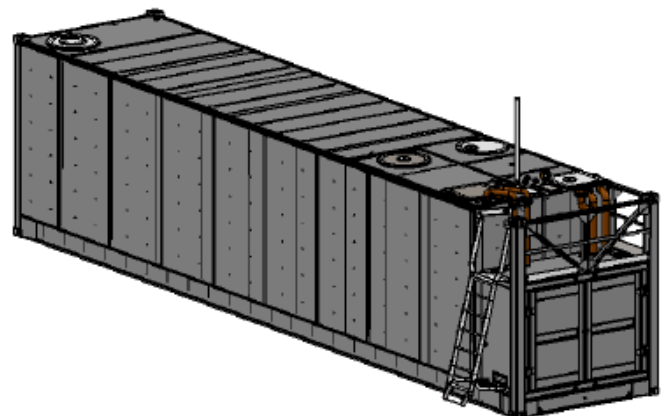

AUTHORISED DISTRIBUTOR OF



www.logitank.com.au

Information and photographs are for marketing purposes only and are considered accurate at time of publication. Actual product may differ to images shown due to continual improvement processes, design changes and optional extras. V3417