

# Logitank Klassic LTKKL 38

A self banded and transportable KLASSIC tank for the safe storage and handling of diesel and oils. Ideal for refuelling vehicles, machinery, equipment and fleet.



*Pictured with optional dispensing package*

## Features


- Greater than 110% bunding
- Fluid level dipsticks for tank and interstitial space
- Vent pipes for tank and interstitial space
- Anti-syphon valve, overfill protection and electronic overfill alarm
- Corner container lock castings for ease of transport
- Access manway
- Option of different colours
- Warranty – 5 years structural, 1 year on valves; conditions apply

## Options include:

- Inspection ladder
- Clip-on pump bay
- Dispensing and fuel management

## Tank Specifications

| Description           |                                                |
|-----------------------|------------------------------------------------|
| Safe Fill, litres     | 33,987                                         |
| Length, mm            | 6,058                                          |
| Width, mm             | 2,438                                          |
| Height, mm            | 2,896                                          |
| Tare Weight, kg       | 8,037                                          |
| Vent Pipes            | Standard                                       |
| Fluid Level Dipsticks | Standard                                       |
| Compliance            | AS1940, AS1692, UL142, HSW (Haz.Sub.) Reg 2017 |

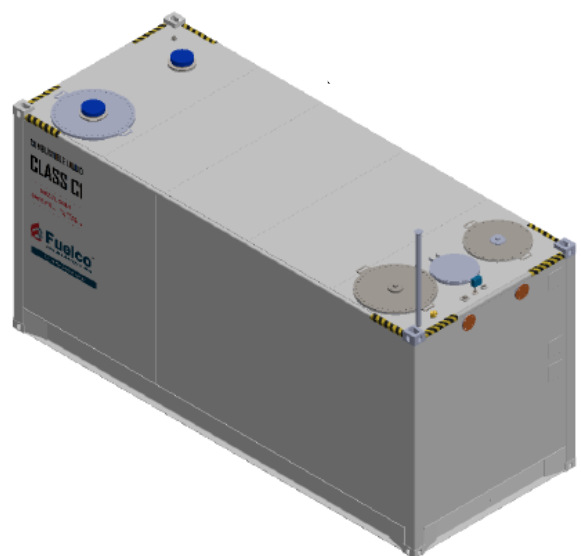

AUTHORISED DISTRIBUTOR OF



[www.logitank.com.au](http://www.logitank.com.au)

*Information and photographs are for marketing purposes only and are considered accurate at time of publication. Actual product may differ to images shown due to continual improvement processes, design changes and optional extras. V3417*